



GLITERA

HEAVY DUTY


OUTDOOR

VITRIFIED TILES

400 x 400 MM


Punch Series

www.gliteraceramic.com



01-1001





01-1002





01-1003





01-1004





01-1005






01-1006






01-1007






01-1008





01-1009






01-1010





01-1011





01-1012





01-1013





01-1014






01-1015





01-1016






01-1017





01-1018






01-1019





01-1020






01-1021






01-1022






01-1023

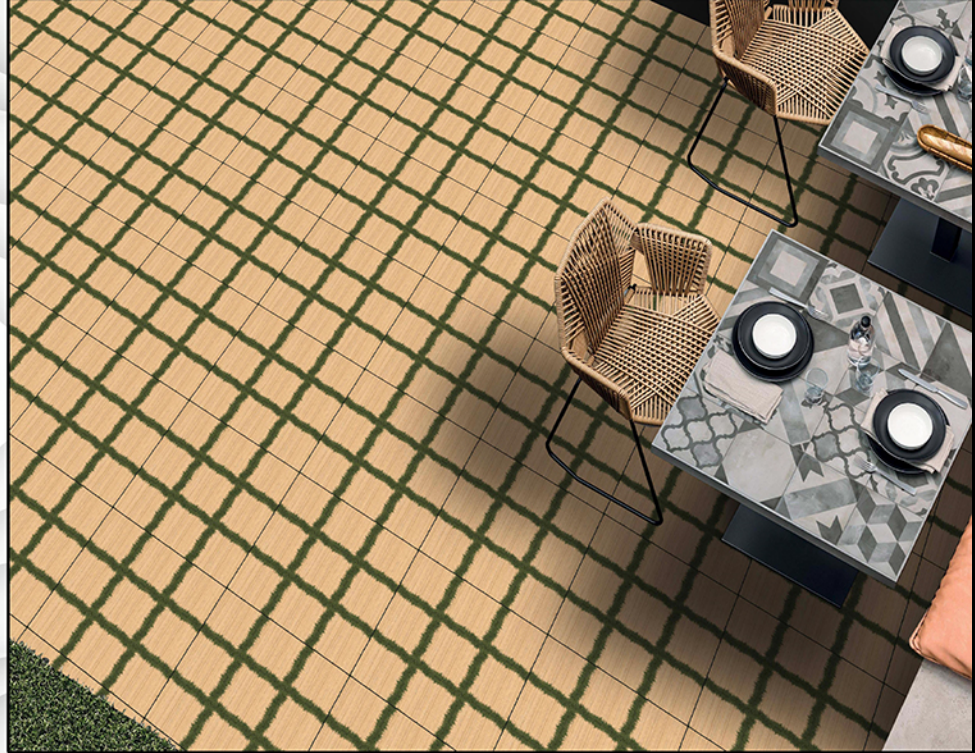




01-1024





01-1025





01-1026






01-1027





01-1028







01-1029





01-1030

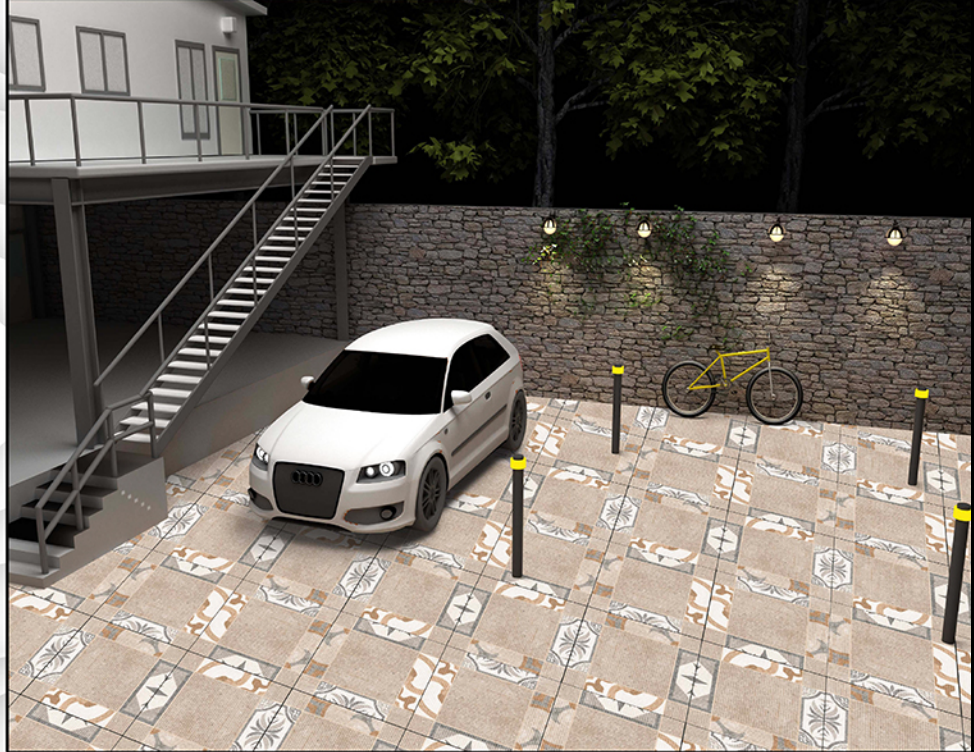



01-1031






01-1032






01-1033

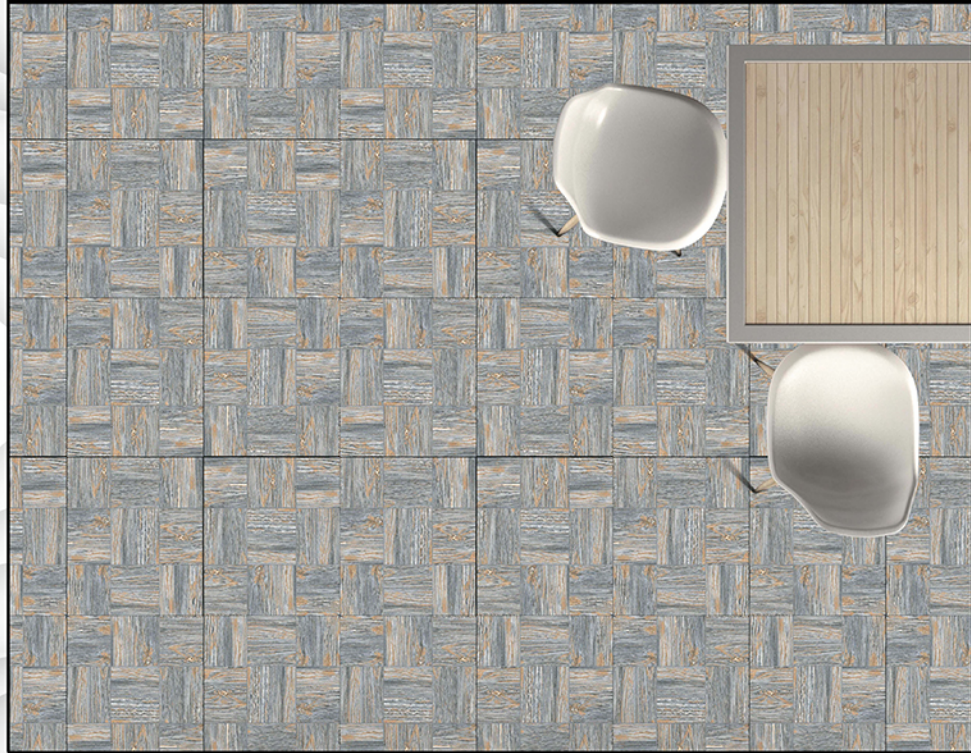



01-1034

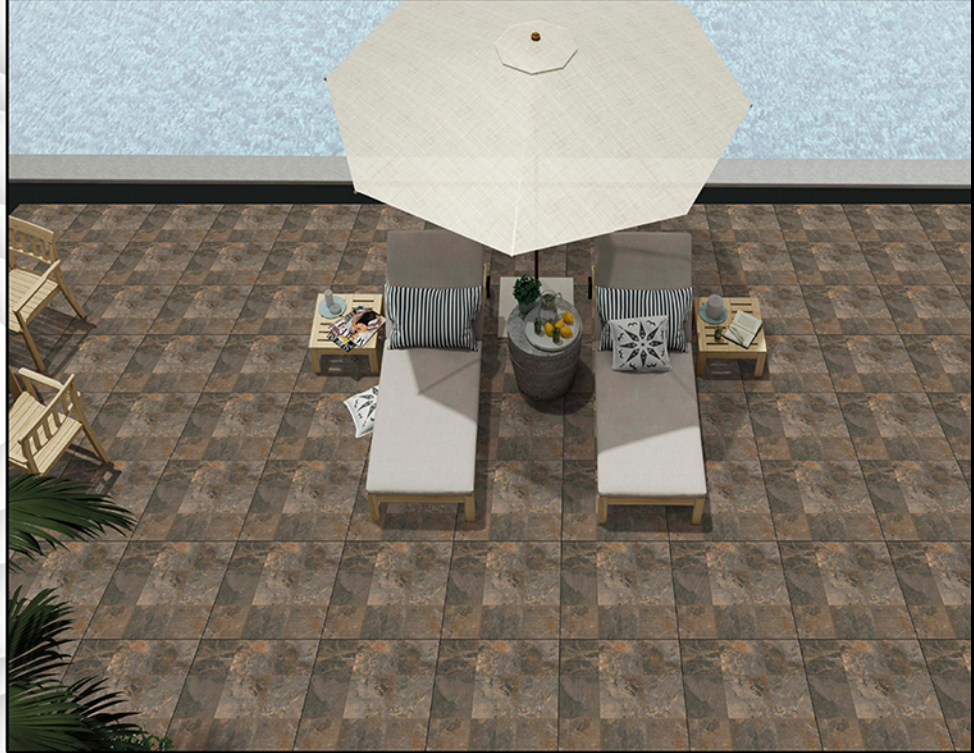



01-1035





01-1036






01-1037






01-1038

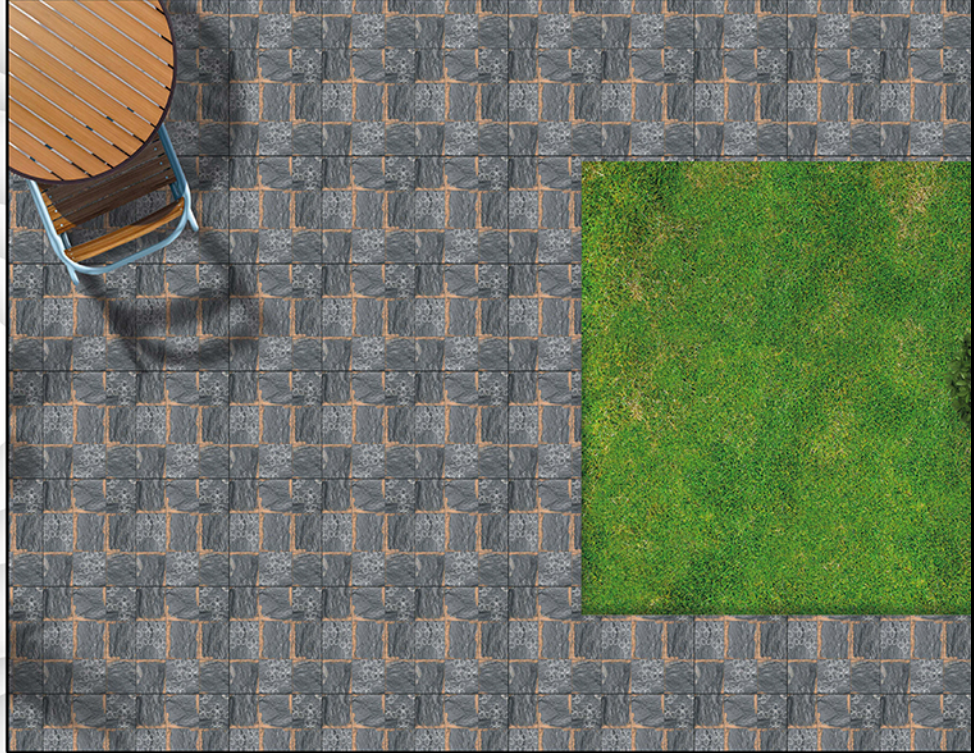




01-1039






01-1040





02-1201

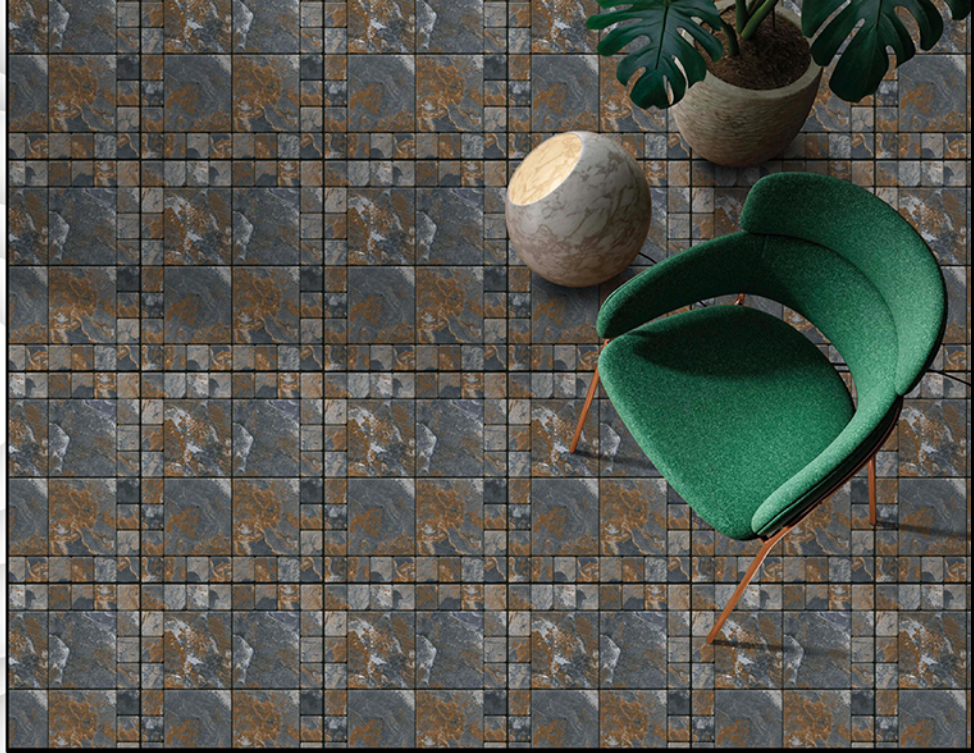




02-1202





02-1203

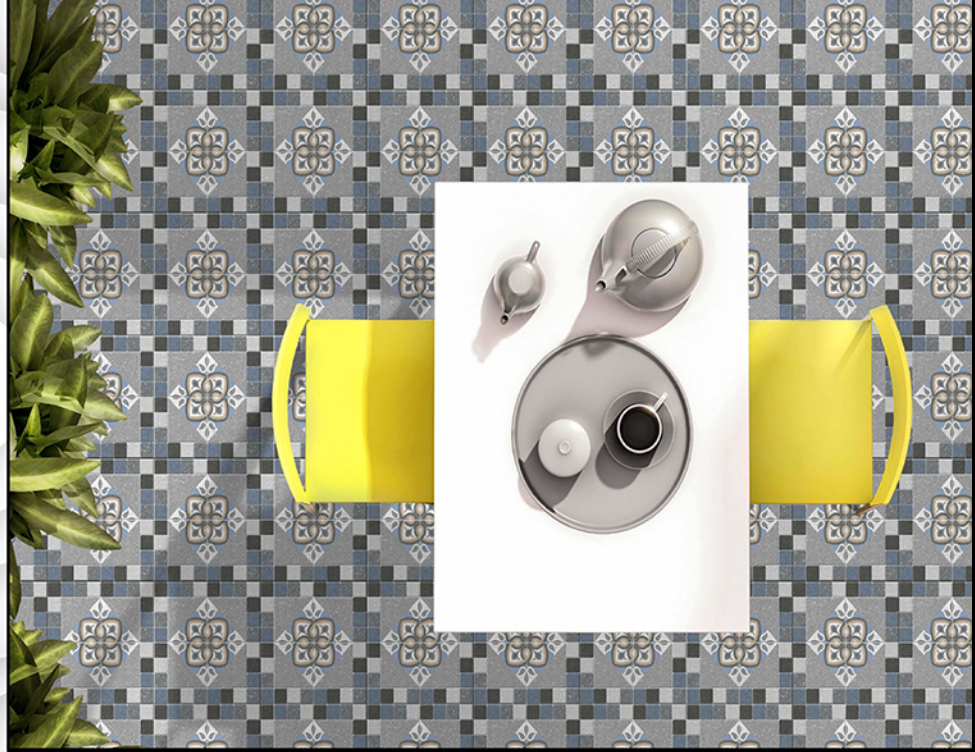



02-1204





02-1205





02-1206






02-1207





02-1208






03-1301






03-1302






03-1303





03-1304





03-1305





03-1306






03-1307





03-1308






03-1309






03-1310





03-1311






03-1312





03-1313






03-1314






03-1315





03-1316

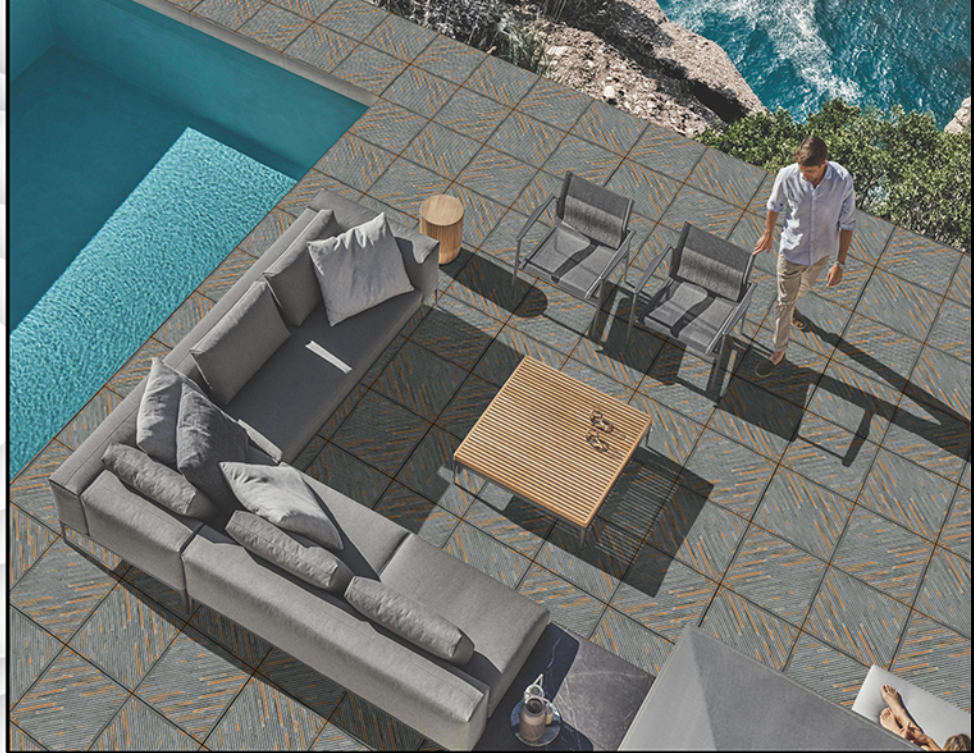



03-1317






03-1318





03-1319






03-1320






03-1321





03-1322






03-1323





03-1324

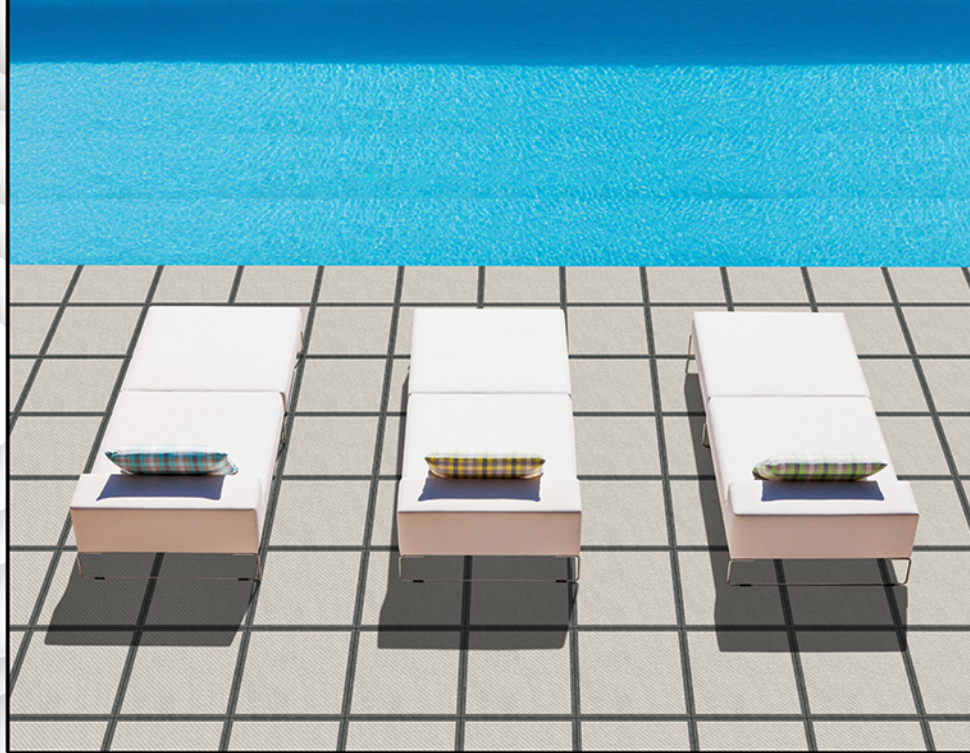



03-1325






03-1326





03-1327






03-1328





03-1329







03-1330






03-1331

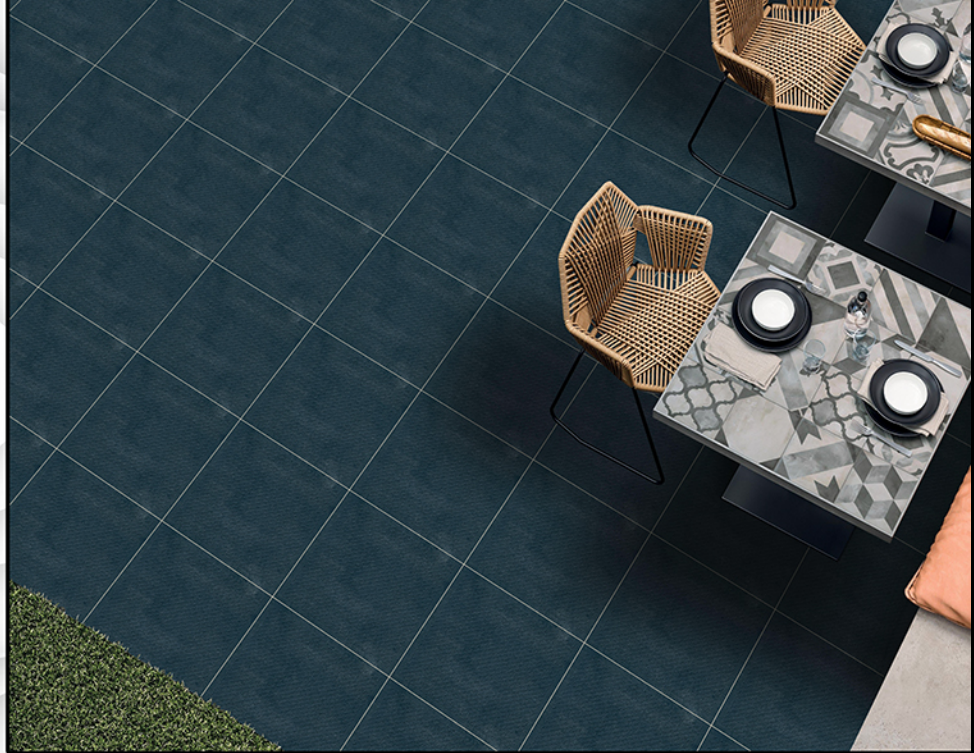



03-1332






03-1333





03-1334

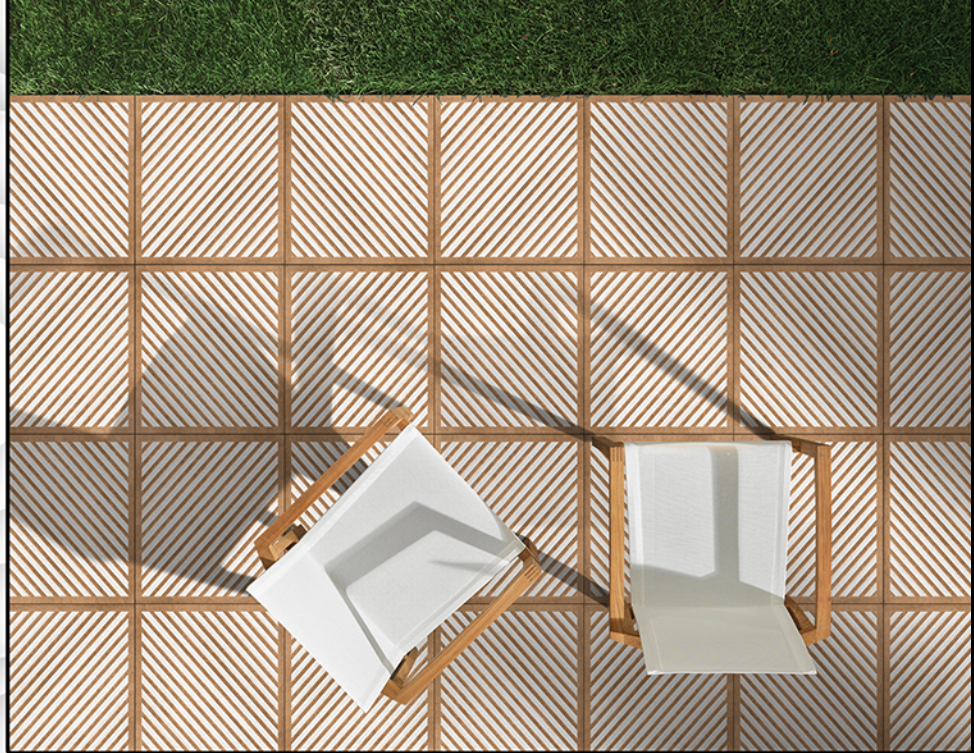



03-1335



SIZE (In mm)	Packing	Coverage Area	Thickness	Box Wt. (Kgs)
400 x 400 mm Digital	5 Pcs.	0.80 sq. mtr.	12.0 mm	18 kg
500 x 500 mm Digital	3 Pcs.	0.75 sq. mtr.	12.0 mm	18 kg

TEN COMMANDMENTS FOR LAYING TILES.

- 1 Surface Should Be Cleaned Properly Before installation.
- 2 Tiles Should Be Segregated According To Batch O. & Manufacturing Date.
- 3 Dry fixing: lay the tiles in the desired patterns, shades and designs etc. before final laying.
- 4 Fixing by good quality tile-adhesive or with 1:4 cement & sand powder.

- 5 Use of 2 to 5 mm SPACERS is recommended.
- 6 Do not use an iron hammer or some heavy material to press the tile.
- 7 After 48 hours for bed curing, fill the joints with desired grouts.
- 8 Clean tiles with detergent power or soap.
- 9 Cover the surface with plastic sheet/POP until it becomes ready for use.
- 10 All design are sedise.

PERFORMANCE



Scratch proof



High Abrasion Resistance

High Thermal shock
Withstand Capability
From -60°C To +60°C

Stain Proof

High Breaking
Strength

High Density

Lowest Water
Absorption
~ 0.05 %Chemical and
Acid Resistant

APPLICATION



Airport



Toilets

IT Parks &
Software BuildingSuper Specialty
Hospitals

Railway stations

Hi - Tech
Building Areas

Swimming Pools



Show Rooms



GLITERA

www.gliteraceramic.com