

New Collection

FULLBODY

Fill your life with creativity



600x
600mm

600x
1200mm

300x
1200mm



Adventurous
nature

600x
600mm



HIGH
STRENGTH



<0.05% WATER
absorption



SLIP
RESISTANT




MAINTENANCE
FREE



SIZE : 600x600mm

FINISH : SATIN / RUSTIC / POLISH

THICKNESS : 9mm



DENSE COFFEE




DENSE CREMA



DENSE COPPER



DENSE GREY



DENSE NEGRO



DENSE LUX



DENSE VERDE




DENSE SAHARA

DENSE COPPER



DENSE NEGRO

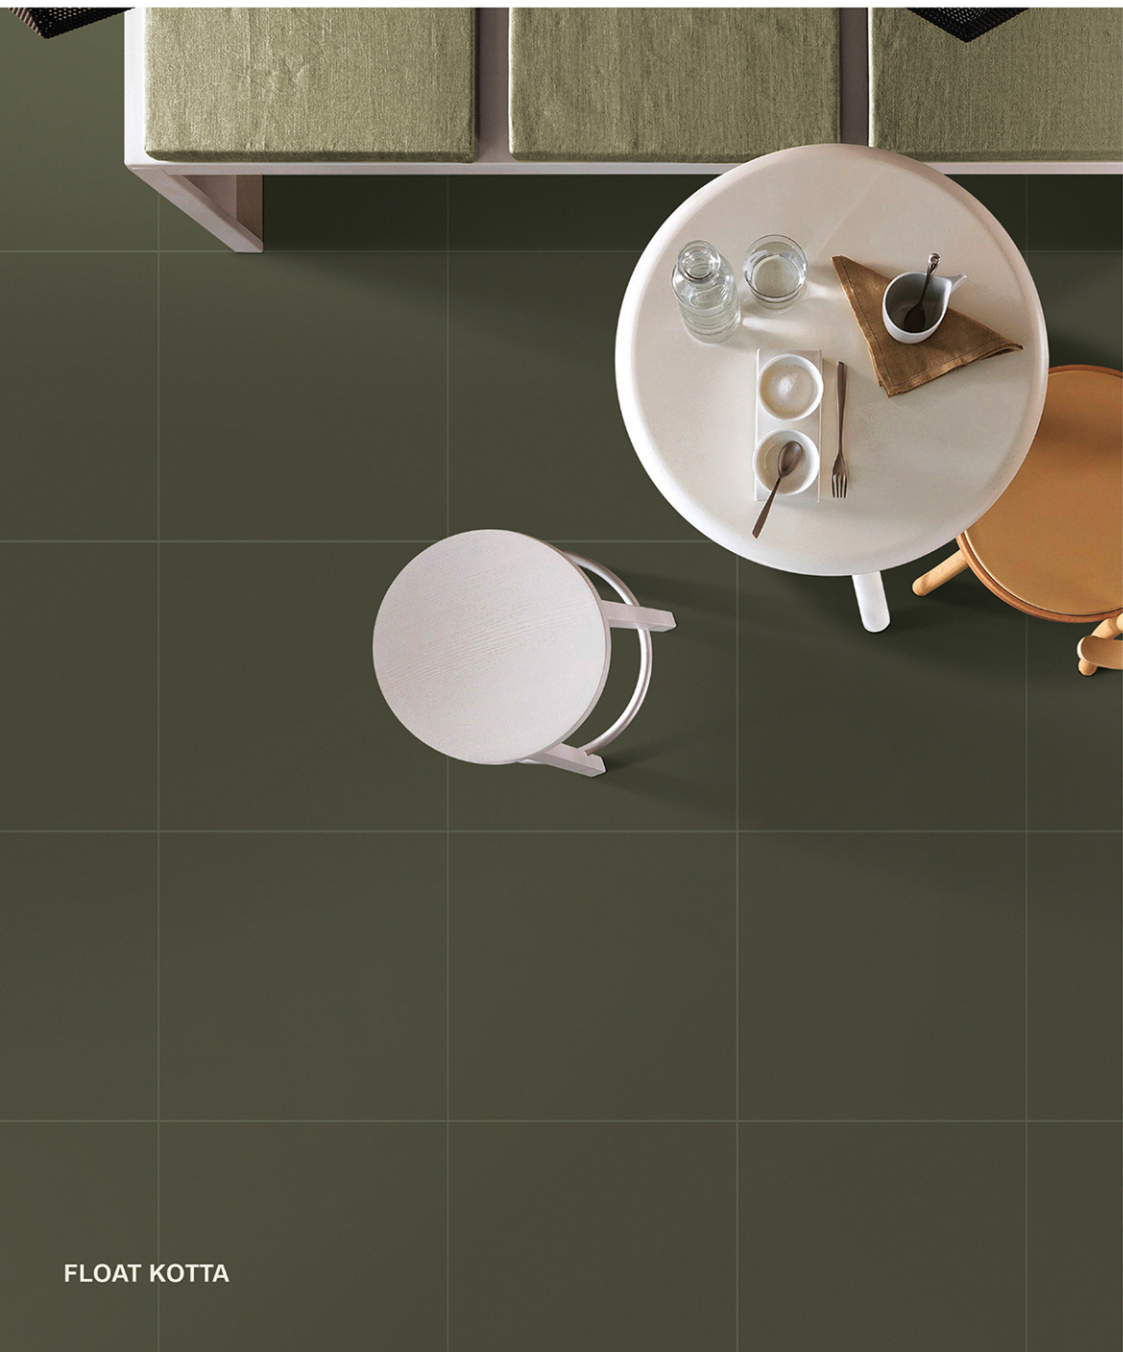

FLOAT KOTTA

SIZE : 600x600mm

FINISH : SATIN

THICKNESS : 9mm



FLOAT XL GREY




FLOAT GREY



FLOAT JET BLACK




FLOAT CREMA



FLOAT MUSHROOM



FLOAT KOTTA



FLOAT SUPER WHITE



FLOAT MUSHROOM



SIZE : 600x600mm

FINISH : SATIN / RUSTIC / POLISH

THICKNESS : 9mm



GLIMPSE BLACK



GLIMPSE WHITE



GLIMPSE BLACK



MOSAIC WHITE


SIZE : 600x600mm

FINISH : SATIN / POLISH


THICKNESS : 9mm



MOSAIC WHITE



MOSAIC NERO



MOSAIC GREY



MOSAIC BROWN




MOSAIC CREMA



MOSAIC GREY



Tranquil
creation

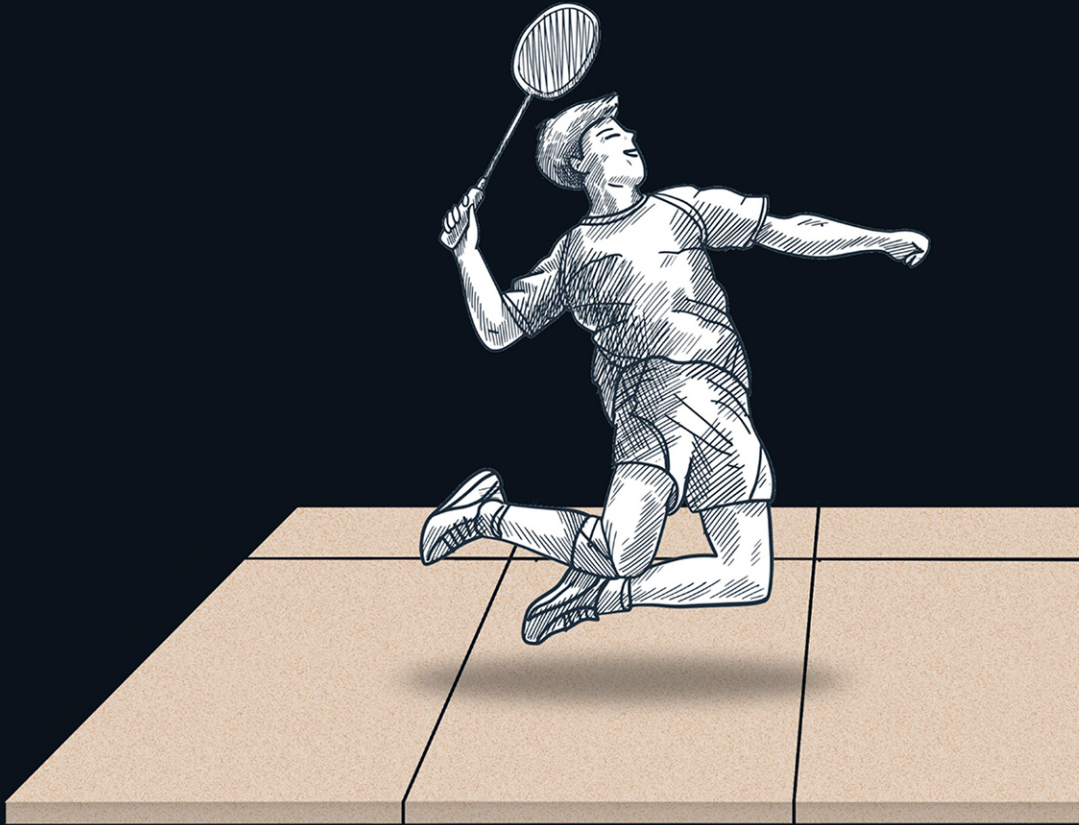

600x
600mm

[Thickness - **16mm**]



**HIGH
STRENGTH**




**<0.05% WATER
absorption**



**SLIP
RESISTANT**




**MAINTENANCE
FREE**

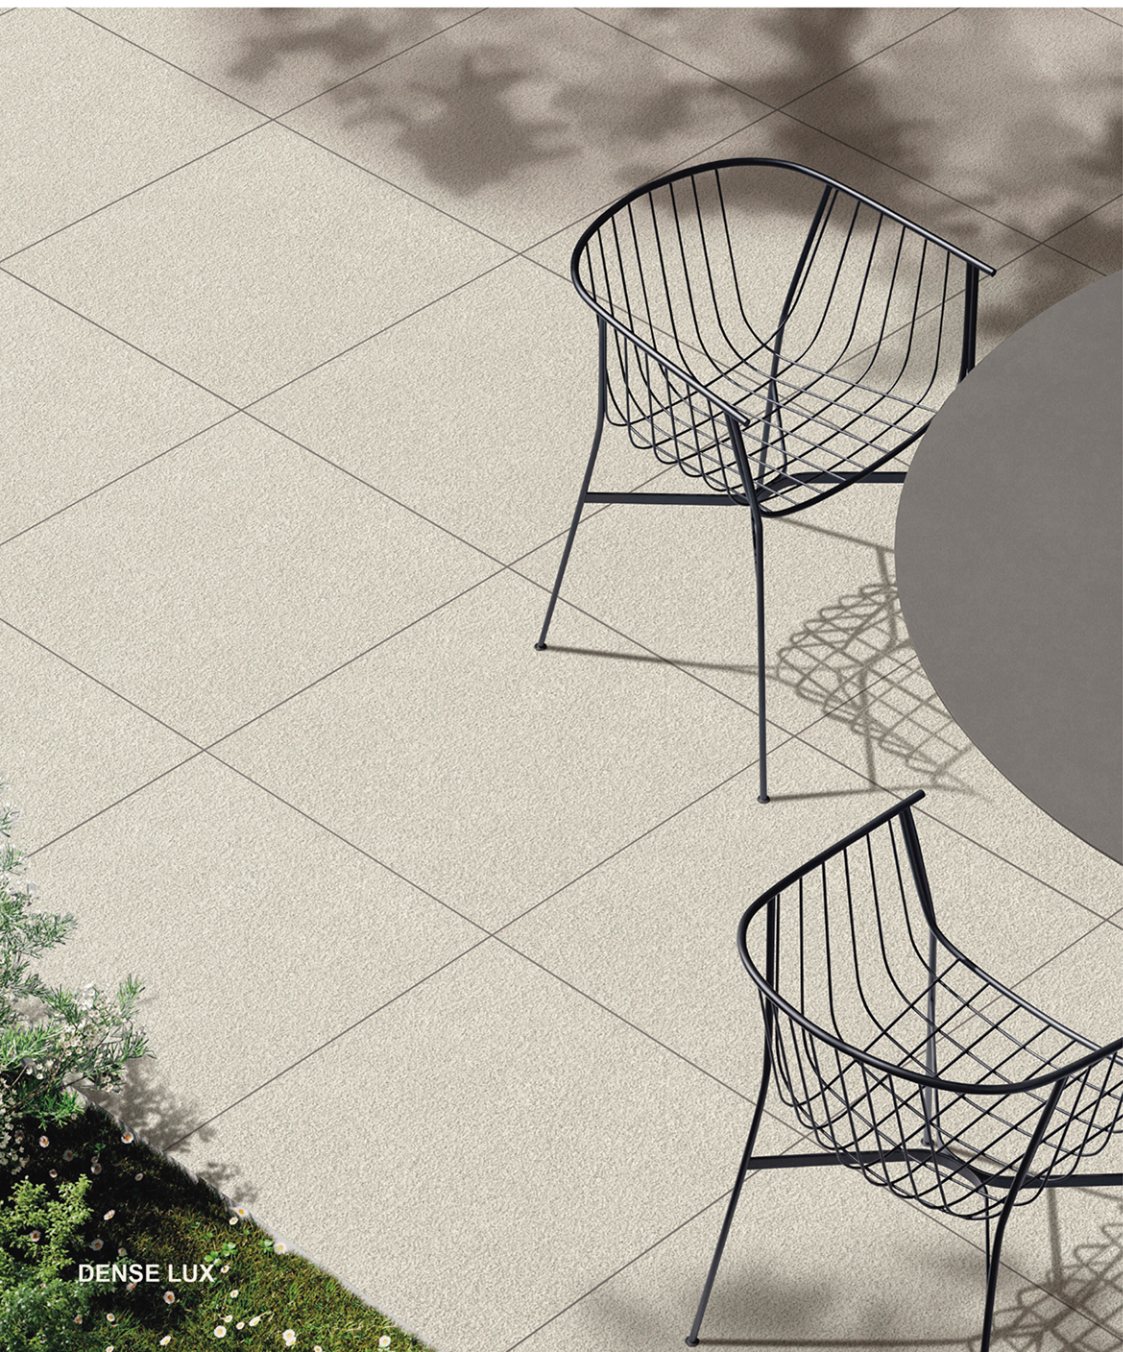

SIZE : 600x600mm

FINISH : SATIN / RUSTIC

THICKNESS : 16mm



DENSE COFFEE




DENSE CREMA



DENSE LUX



DENSE GREY



DENSE NEGRO



DENSE SAHARA



DENSE VERDE






DENSE SAHARA

Elemental

world

600x
1200mm

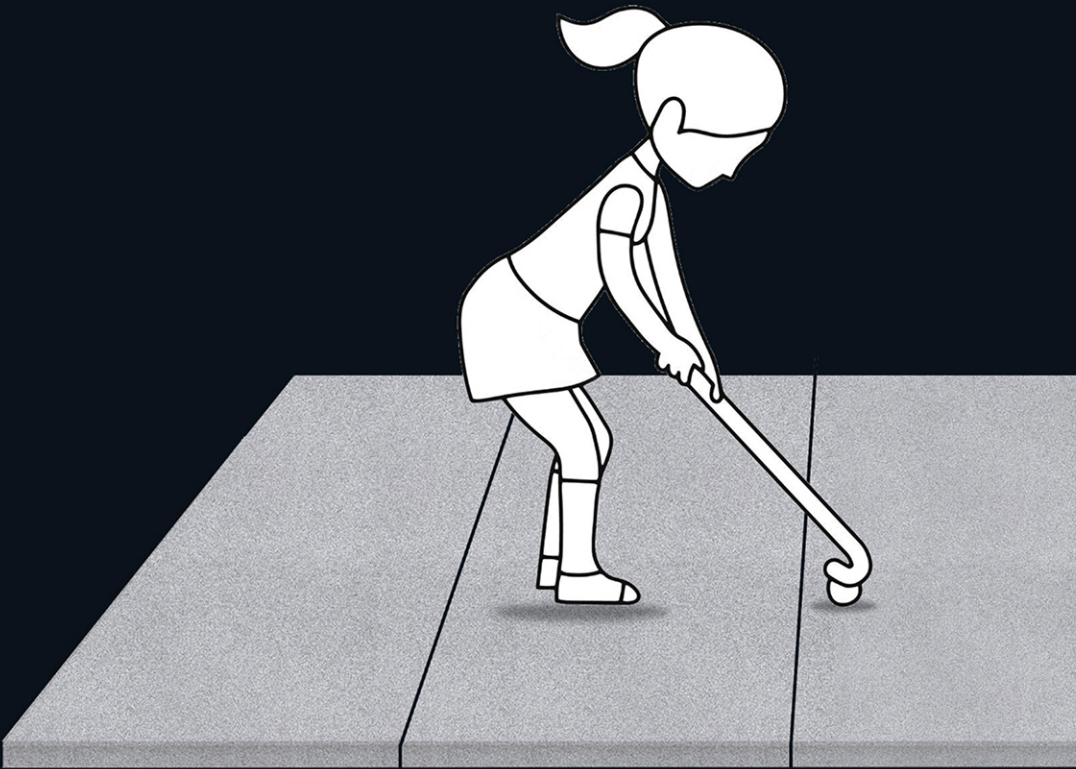

HIGH
STRENGTH



<0.05% WATER
absorption



SLIP
RESISTANT



MAINTENANCE
FREE

SIZE : 600x1200mm

FINISH : SATIN

THICKNESS : 9mm



DENSE GREY



DENSE GREY



DENSE CREMA



DENSE COFFEE



DENSE NEGRO

SIZE : 600x1200mm

FINISH : SATIN

THICKNESS : 9mm



DENSE VERDE



DENSE SAHARA



DENSE VERDE



DENSE LUX



DENSE CREMA




FLOAT CREMA

SIZE : 600x1200mm

FINISH : SATIN

THICKNESS : 9mm

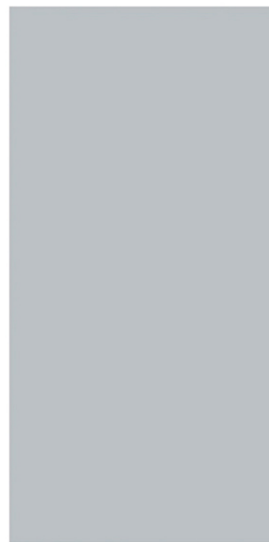

FLOAT XL GREY



FLOAT GREY



FLOAT JET BLACK



FLOAT CREMA




FLOAT KOTA

SIZE : 600x1200mm

FINISH : SATIN


THICKNESS : 9mm

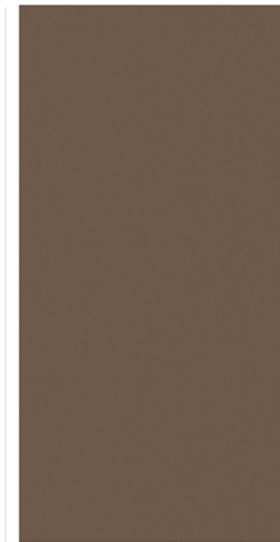

FLOAT MUSHROOM



FLOAT KOTA



FLOAT SUPER WHITE



FLOAT GREY



GLIMPSE WHITE

SIZE : 600x1200mm

FINISH : SATIN / POLISH

THICKNESS : 9mm



GLIMPSE BLACK



GLIMPSE WHITE



GLIMPSE WHITE


SIZE : 600x1200mm

FINISH : SATIN / POLISH

THICKNESS : 9mm



MOSAIC BROWN

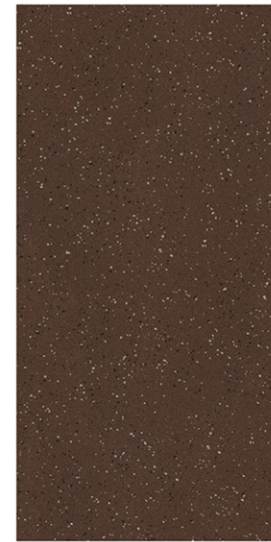


MOSAIC BROWN



MOSAIC NERO



MOSAIC WHITE

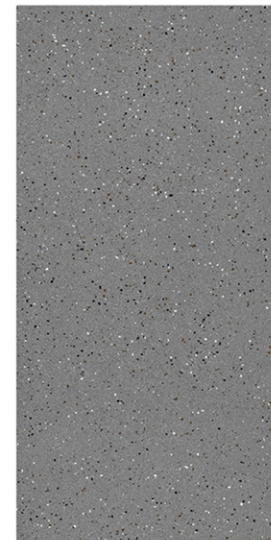

MOSAIC GREY




SIZE : 600x1200mm

FINISH : SATIN / POLISH

THICKNESS : 9mm



MOSAIC CREMA

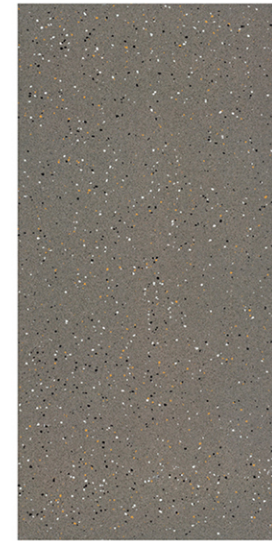

MOSAIC FOSSIL



MOSAIC GALAXY



MOSAIC POLISH WHITE


SIZE : 600x1200mm

FINISH : SATIN

THICKNESS : 9mm



SLATE CREMA

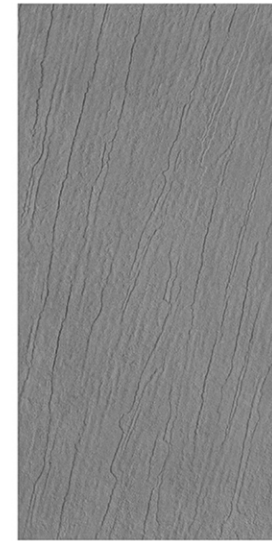

SLATE GREY



SLATE NERO



SLATE CREMA

SIZE : 600x1200mm

FINISH : PUNCH


THICKNESS : 9mm



LINEAR NERO



LINEAR CREMA

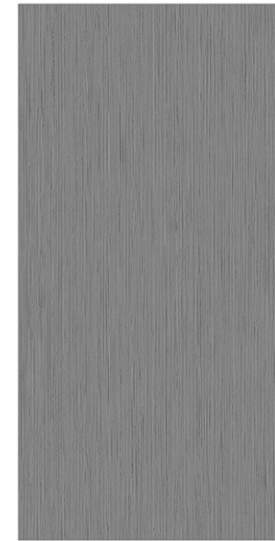

LINEAR GREY



LINEAR NERO



LINEAR BLACK

LINEAR GREY





Gracious
universe

300x
1200mm

[Thickness - **11mm**]



HIGH
STRENGTH



<0.05% WATER
absorption



SLIP
RESISTANT



MAINTENANCE
FREE


SIZE : 300x1200mm

FINISH : SATIN


THICKNESS : 11mm



DENSE COFFEE

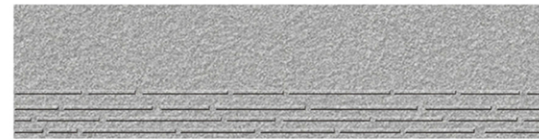


DENSE GREY

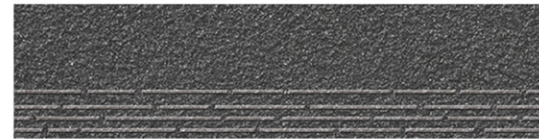

DENSE NEGRO



DENSE CREMA

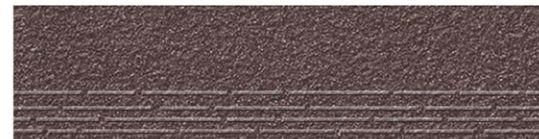

DENSE COFFEE



DENSE SAHARA



DENSE VERDE



DENSE LUX



DENSE CREMA

SIZE : 300x1200mm

FINISH : SATIN / RUSTIC

THICKNESS : 11mm



GLIMPSE BLACK



GLIMPSE WHITE



GLIMPSE BLACK



GLIMPSE WHITE

TECHNICAL SPECIFICATION & PACKING DETAILS FOR FULLBODY VITRIFIED TILES 600X600MM

SR.NO.	TEST REFERENCE (IS 13630:2019)	GLITERA TOLERANCE LIMIT
1	Size variation, IS:13630(pt-1)	+/- 0.2 mm
2	Thickness variation,IS:13630(pt-1)	+/- 0.2 mm
3	Deviation straightness in mm,IS:13630(pt-1)	+/- 0.2 mm
4	Deviation in rectangularity,IS:13630(pt-1)	+/- 0.2 mm
5	War page/curvature,IS:13630(pt-1)	-0.30 to + 0.40 mm
6	Glossiness	Not A
7	Surface Quality,IS:13630(pt-1)	>98% free from visible defects
8	Water absorption,IS:13630(pt-2)	Av E < 0.5 %
9	Modulus of rupture [N/mm ²] IS:13630(PT-6)	Min. 40
	Breaking Strength (N)	Not Less Than 1500N
10	Surface Abrasion Resistance of Glaze Tiles 1 to V IS:13630(pt-11)	Min.50000 Rev pass Class-V (For VC/RT),
11	Scratch Hardness (Moh's scale),IS:13630(pt-13)	Min6
12	Coefficient of linear Thermal Expansion From ambient temperature to 100c (K-1), IS:13630(pt-40)	6x10-6K-1 ,Max
13	Crazing Resistance Glazed tiles ,IS:13630(pt-9)	4 Cycle @7.5 bar
14	Thermal Shock Resistance , IS 13630(pt-5)	Min 10 Cycle Passed
15	Chemical Resistance IS: 13630(pt-7):2019	Min.Class-5 (Marker test) Min Class S Methylene blue test Must be passed)
	Resistance to staining of Un-glaze Tiles Class5-1	Min Class-5
	Resistance to household chemical and swimming pool salts	Class UA
	Resistance to acids and alkalis (with the exception of hydrofluoric acid and its compounds)	Class UHA

NOMINAL SIZE	THICKNESS	FINISH	AVERAGE WEIGHT	NO. TILES PER BOX	COVERAGE PER BOX
600X600MM	9MM	MATT	28.5	4 PCS	1.44 SQ.MTR. 15.5 SQ.FT.
600X600MM	9MM	POLISH	26.5	4 PCS	1.44 SQ.MTR. 15.5 SQ.FT.
600X600MM	16MM	MATT	25	2 PCS	0.72 SQ.MTR. 7.75 SQ.FT.
600X1200MM	9MM	MATT	29	2 PCS	1.44 SQ.MTR. 15.5 SQ.FT.
600X1200MM	9MM	POLISH	28	2 PCS	1.44 SQ.MTR. 15.5 SQ.FT.
300X1200MM	11MM	MATT	36	4 PCS	1.44 SQ.MTR. 15.5 SQ.FT.



GLITERA

Glittering Your Spaces